



1.17

ORION

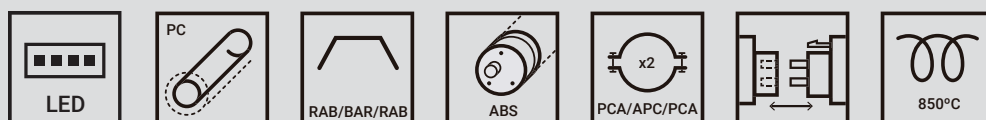

APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES

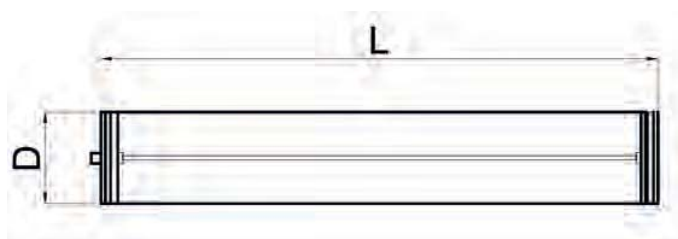

IT - DE



RG 0/1

MACADAM

3/4

UGR
<19

CR>80


L70B50
>
50.000

IP67

IK07

CE

EN 60598-1



Ref.	Tamaño Size Dimension	Potencia Power Puissance	Emisión bruta Gross output Flux de la source	Emisión neta Net output Flux sortant	Tª color Tª colour Tª couleur	L	D	D + brida D + clamp D + fixation	Embalaje Packaging Emballage
		(W)	(Lm)	(Lm)	(°K)	(mm)	(mm)	(mm)	
OR114	600	13	1550	1082	4000	770	81	113	1
OR114U	600	13	1900	1326	4000	770	81	113	1
OR124	600	16	2670	1864	4000	770	81	113	1
OR124U	600	21	3380	2359	4000	770	81	113	1
OR214	1200	24	3200	2234	4000	1380	81	113	1
OR214U	1200	26	3800	2652	4000	1380	81	113	1
OR224	1200	32	5340	3727	4000	1380	81	113	1
OR224U	1200	42	6760	4719	4000	1380	81	113	1
OR314	1500	29	4000	2792	4000	1633	81	113	1
OR314U	1500	32	4750	3315	4000	1633	81	113	1
OR324	1500	40	6700	4677	4000	1633	81	113	1
OR324U	1500	46	7000	4886	4000	1633	81	113	1

REF. + U = TENSIÓN DE ALIMENTACIÓN 110-277V/50-60HZ


1.17

ORION

BAJAS TEMPERATURAS LOW TEMPERATURES BASSES TEMPÉRATURES



Brida
Clamp
Collier



Ref.	Tamaño Size Dimension	Potencia Power Puissance	Emisión bruta Gross output Flux de la source	Emisión neta Net output Flux sortant	Tª color Tª colour Tª couleur	Largo Length Longueur	Ancho Wide Large	Ancho con brida Width with clamp Largeur avec fixation	Embalaje Packaging Emballage
	(mm)	(W)	(Lm)	(Lm)	(°K)	(mm)	(mm)	(mm)	
OC123	600	32	4300	3000	3000	770	81	113	1
OC124	600	32	4600	3200	4000	770	81	113	1
OC223	1200	64	8600	6000	3000	1380	81	113	1
OC224	1200	64	9000	6300	4000	1380	81	113	1
OC323	1500	80	10750	7500	3000	1633	81	113	1
OC324	1500	80	11400	8000	4000	1633	81	113	1

ACCESORIOS ORION / ORION ACCESORIES / ACCESSOIRES ORION



Ref.

Q0349

Suspensión con cable de acero
Steel cable suspension
Suspension avec câble en acier



Q0347

Bridas de acero inoxidable
Stainless steel clamps
Colliers inox antivandalisme



Q0348

Bridas de acero inoxidable de apertura
rápida
Quick opening stainless steel clamps
Colliers inox de ouverture rapide à grenouillère



Ref.

Q0339

Tapas metálicas y racor metálico
Metallic end caps and cable glands
Embouts et presse-étoupes métalliques

LÍNEA CONTINUA
CONTINUOUS LINE CONNECTION
CÂBLAGE TRAVERSANT

3 polos / 3 poles / 3 pôles

Ref. Q0578

5 polos / 5 poles / 5 pôles

Ref. Q0579

1-10
DALI

EMERGENCY
1h / 3h