# 2.3




















### APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES









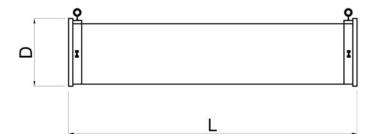



IT - DE

IP66

IK10

**CE** EN 60598-1

2014/34/EU

Ex

II2GD
Ex db IIB+H2 T6 G
Ex tb IIIC T85°C Db





### TUBO FLUORESCENTE / LAMP / LAMP

G13/T8

Ref.	<b>Potencia</b> Watts Puissance	<b>Equipo</b> Equipment <i>Ballast</i>	L	D	<b>D + brida</b> D + clamp D + fixation	<b>Embalaje</b> Packaging <i>Emballage</i>	
	(W)		(mm)	(mm)	(mm)		
EX005	1 x 18		748	190	208	1	
EX001	1 x 36		1.357	190	208	1	
EX009	1 x 58		1.659	190	208	1	
EX006	2 x 18	2 x 18		190	208	1	
EX002	2 x 36		1.357	190	208	1	
EX010	2 x 58	2 x 58		1.659 190		1	

### ■ Electrónica / Electronic / Électronique





1x 2x

# **PYROS**

### TUBO LED / LED TUBE / TUBE LED

G13/T8


Ref.	<b>Longitud tubo</b> Tube lenght <i>Longueur tube</i>	L	D	<b>D + brida</b> D + clamp D + fixation	<b>Embalaje</b> Packaging <i>Emballage</i>	<b>Peso</b> Weight <i>Poids</i>
	(mm)	(mm)	(mm)	(mm)		(Kg)
EX005L	1 x 600	748	190	208	1	9,7
EX001L	1 x 1.200	1.357	190	208	1	11,5
EX009L	1 x 1.500	1.659	190	208	1	12,3
EX006L	2 x 600	748	190	208	1	9,7
EX002L	2 x 1.200	1.357	190	208	1	11,5
EX010L	2 x 1.500	1.659	190	208	1	12,3

### **ACCESORIOS PYROS** / PYROS ACCESORIES / *ACCESSOIRES PYROS*



## **PRENSAESTOPA CABLE ARMADO /** ARMED CABLEGLAND EEX / PRESSE-ÉT OUPE ARMÉ EEX

Ref.	<b>Tamaño de rosca (R)</b> Thread size <i>Taille du filet (R</i>				<b>Dimensiones</b> Dimensions Dimensions			<b>Ø Exterior</b> Ø Overal Ø Extérieur			
	Métrica Metrics Métrique	PG.	NPT	Gas cónica Gas conic Gaz conique	А	В	С	D	Min.	Max.	Tipo Type Tipo
EX507	M25x1,5	16 21	3/4" 1"	3/4" 1"	35	39	42	15	12	14	а





1-10	EMERGENCY
DALI	1h / 3h