





1.12


TUNNEL



Brida
Clamp
Collier



APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES

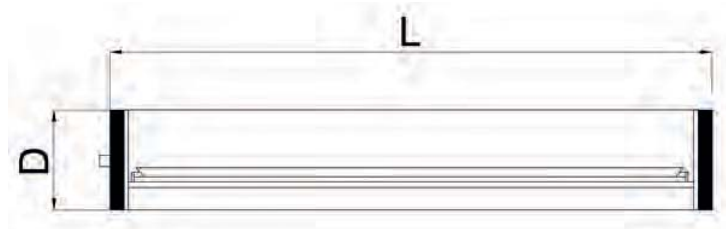

IT - DE



IK10

IP68-2



CE

EN 60598-1



TUBO FLUORESCENTE / LAMP / LAMP

G5/T5



Ref.	Potencia Watts Puissance	Equipo Equipment Ballast	L	D	D + brida D + clamp D + fixation	Embalaje Packaging Emballage
	(W)		(mm)	(mm)	(mm)	
Q0801	1 x 14	■	675	105	133	1
Q0805	1 x 24	■	675	105	133	1
Q0802	1 x 21	■	970	105	133	1
Q0806	1 x 39	■	970	105	133	1
Q0803	1 x 28	■	1276	105	133	1
Q0808	1 x 54	■	1276	105	133	1
Q0804	1 x 35	■	1.578	105	133	1
Q0807	1 x 49	■	1.578	105	133	1
Q0809	1 x 80	■	1.578	105	133	1
Q0819	2 x 14	■	675	105	133	1
Q0823	2 x 24	■	675	105	133	1
Q0820	2 x 21	■	970	105	133	1
Q0824	2 x 39	■	970	105	133	1
Q0821	2 x 28	■	1276	105	133	1
Q0826	2 x 54	■	1.276	105	133	1
Q0822	2 x 35	■	1.578	105	133	1
Q0825	2 x 49	■	1.578	105	133	1

■ Electrónica / Electronic / Électronique

1.12

TUNNEL

TUBO LED / LED TUBE / TUBE LED

G13/T8

Ref.	Longitud tubo Tube lenght Longueur tube	L	D	D + brida D + clamp D + fixation	Embalaje Packaging Emballage
	(mm)	(mm)	(mm)	(mm)	
Q0801L	1 x 600	721	105	133	1
Q0802L	1 x 900	1.055	105	133	1
Q0803L	1 x 1.200	1.321	105	133	1
Q0804L	1 x 1.500	1.581	105	133	1
Q0805L	2 x 600	721	105	133	1
Q0806L	2 x 900	1.055	105	133	1
Q0807L	2 x 1.200	1.321	105	133	1
Q0808L	2 x 1.500	1.581	105	133	1

ACCESORIOS TUNNEL/ TUNNEL ACCESORIES/ TUNNEL ACCESSOIRES



Ref.	Q0349	Q0156
	Suspensión con cable de acero Steel cable suspension <i>Suspension avec câble en acier</i>	Bridas de acero inoxidable de apertura rápida Quick opening stainless steel clamps <i>Colliers inox de ouverture rapide à grenouillère</i>

LÍNEA CONTINUA

CONTINUOUS LINE CONNECTION
CÂBLAGE TRAVERSANT

3 polos / 3 poles / 3 pôles

Ref. Q0576

5 polos / 5 poles / 5 pôles


Ref. Q0577

1-10
DALI


EMERGENCY
1h / 3h

1.11

TUNNEL LED

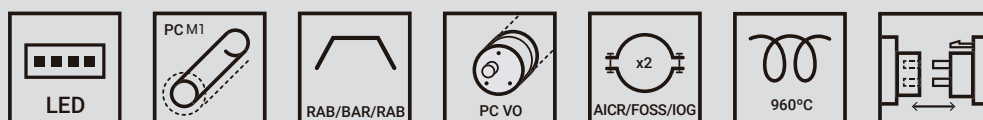

APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES

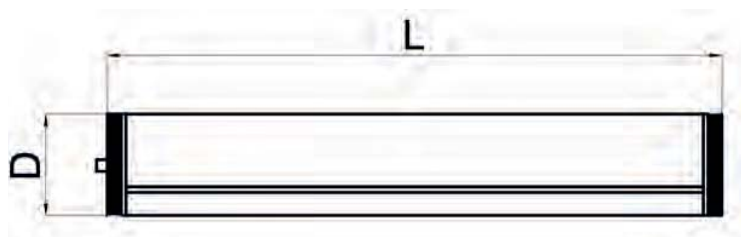

IT - DE



RG 0/1

MACADAM

3/4

UGR
<19

CR>80


L70B50
>
50.000

IP68-2

IK10

CE

EN 60598-1



Ref.	Tamaño Size Dimension	Potencia Power Puissance	Emisión bruta Gross output Flux de la source	Emisión neta Net output Flux sortant	Tª color Tª colour Tª couleur	L	D	D + brida D + clamp D + fixation	Embalaje Packaging Emballage
		(W)	(Lm)	(Lm)	(°K)	(mm)	(mm)	(mm)	
TU114	600	13	1550	1127	4000	788	100	133	1
TU114U	600	13	1900	1381	4000	788	100	133	1
TU124	600	16	2670	1942	4000	788	100	133	1
TU124U	600	21	3380	2457	4000	788	100	133	1
TU214	1200	24	3200	2328	4000	1302	100	133	1
TU214U	1200	26	3800	2764	4000	1302	100	133	1
TU224	1200	32	5340	3884	4000	1302	100	133	1
TU224U	1200	42	6760	4917	4000	1302	100	133	1
TU314	1500	29	4000	2910	4000	1648	100	133	1
TU314U	1500	32	4750	3455	4000	1648	100	133	1
TU324	1500	40	6700	4873	4000	1648	100	133	1
TU324U	1500	46	7000	5091	4000	1648	100	133	1

REF. + U = TENSION DE ALIMENTACIÓN 110-277V/50-60HZ

ACCESORIOS TUNNEL LED

ACCESSORIES TUNNEL LED

ACCESSOIRES TUNNEL LED



Ref.

Q0349

Suspensión con cable de acero
Steel cable suspension
Suspension a vec câble en acier



Q0156

Bridas de acero inoxidable de apertura rápida
Quick opening stainless steel clamps
Colliers inox de ouverture rapide à grenouillère

LÍNEA CONTINUA

CONTINUOUS LINE CONNECTION
CÂBLAGE TRAVERSANT

3 polos / 3 poles / 3 pôles

Ref. Q0970

5 polos / 5 poles / 5 pôles

Ref. Q0971

1-10
DALI

EMERGENCY
1h / 3h