





2.6


FLAME



Brida
Clamp
Collier



APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES

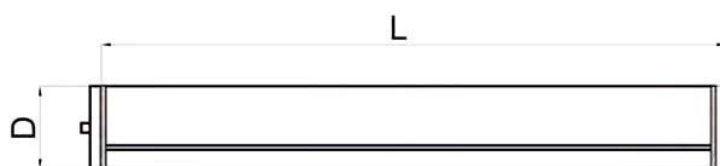

IT - DE



IP68-2

IK10

CE
EN 60598-1

2014/34/UE



II 2GD
Ex e mb IIC T4 Gb
Ex tb IIIC T85°C Db
(T95°C para 58W)




TUBO FLUORESCENTE / LAMP / LAMP


T8

Ref.	Potencia Watts Puissance	Equipo Equipment Ballast	L	D	D + brida D + clamp D + fixation	Embalaje Packaging Emballage
	(W)		(mm)	(mm)	(mm)	
EX301	1 x 18	■	775	100	133	1
EX302	1 x 36	■	1.385	100	133	1
EX303	1 x 58	■	1.685	100	133	1
EX304	2 x 18	■	775	100	133	1
EX305	2 x 36	■	1.385	100	133	1
EX306	2 x 58	■	1.685	100	133	1

■ Electrónica / Electronic / Électronique



1x



2x

ACCESORIOS FLAME / FLAME ACCESORIES / ACCESSOIRES FLAME

LÍNEA CONTINUA
CONTINUOUS LINE CONNECTION
CÂBLAGE TRAVERSANT

3 polos / 3 poles / 3 pôles

Ref. Q0574

5 polos / 5 poles / 5 pôles

Ref. Q0575