

2.1

PYROS LED






+ **Brida**
Clamp
Collier




+ **Tapón EEx db**
Plug EEx db
Bouchon EEx db



+ **Prensaestopa EEx db**
Cablegland EEx db
Presse-étoupe EEx db



APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES

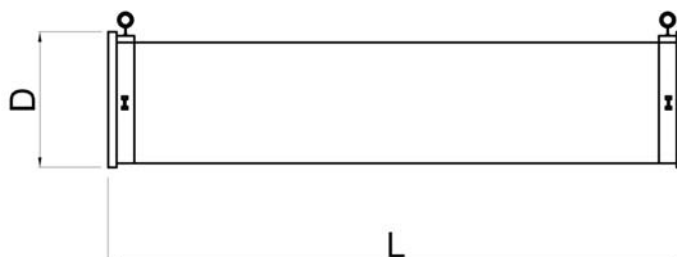

IT - DE



RG1

MACADAM

3/4

UGR
<19

CR>80

L70B50
>
50.000


IP66
IK10

CE
EN 60598-1

2014/34/EU



II/2GD
Ex db op is IIB+H2 T6 Gb
Ex op is tb IIIC T85'Db




Ref.	Tamaño Size Dimension	Potencia Power Puissance	Emisión bruta Gross output Flux de la source	Tª color Tª colour Tª couleur	L	D	D + brida D + clamp D + fixation	Embalaje Packaging Emballage
	(mm)	(W)	(Lm)	(°K)	(mm)	(mm)	(mm)	
PY113	600	14	2150	4000	748	150	208	1
PY123	600	28	4300	4000	748	150	208	1
PY213	1200	28	4300	4000	1357	150	208	1
PY223	1200	55	8600	4000	1357	150	208	1
PY313	1500	35	5370	4000	1659	150	208	1
PY323	1500	70	10740	4000	1659	150	208	1

ACCESORIOS PYROS LED/ PYROS LED ACCESORIES / ACCESSOIRES PYROS LED



PRENSAESTOPA CABLE ARMADO / ARMED CABLEGLAND EEX /
PRESSE-ÉT OUPE ARMÉ EEX

Ref.	Tamaño de rosca (R) Thread size Taille du filet (R)				Dimensiones Dimensions Dimensions				Ø Exterior Ø Overall Ø Extérieur		
	Métrica Metrics Métrique	PG.	NPT	Gas cónica Gas conic Gaz conique	A	B	C	D	Min.	Max.	Tipo Type Tipo
EX507	M25x1,5	16 21	3/4" 1"	3/4" 1"	35	39	42	15	12	14	a

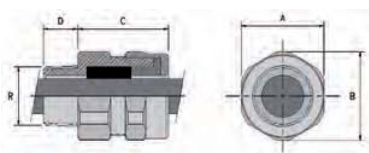

Ex II 2 GD EEx db IIC T6

1-10
DALI



EMERGENCY
1h / 3h

2.2

PYROS BLOCK LED



APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES

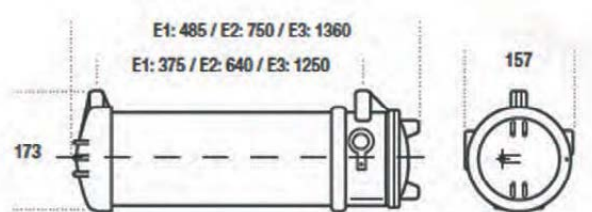

IT - DE



RG1

MACADAM
3/4

UGR
<19

CR>80

L70B50
>
50.000


IP66
IK07

CE
EN 60598-1

2014/34/EU



II 2GD
Ex db IIC T6 Gb
Ex tb IIIC T85°C Db



Ref.	Fuente de luz Light source Source de lumière (lm)	Autonomía Battery life Autonomie	Manteined Non Manteined	L (mm)	D (mm)	Embalaje Packaging Emballage
EXZ10	350	1H	NM	485	173	1
EXZ11	2100 / 750	1H	M / NM	485	173	1
EXZ12	750	1H	NM	750	173	1
EXZ13	4600 / 750	1H	M / NM	750	173	1
EXZ14	4600 / 750	1H	M / NM	1360	173	1
EXZ15	350	3H	NM	485	173	1
EXZ16	750	3H	NM	485	173	1
EXZ17	750	3H	NM	1360	173	1
EXZ18	4600 / 750	3H	M / NM	750	173	1
EXZ19	4600 / 750	3H	M / NM	1360	173	1

2.3

PYROS






+ **Brida**
Clamp
Collier



+ **Tapón EEx db**
Plug EEx db
Bouchon EEx db



+ **Prensaestopa EEx db**
Cablegland EEx db
Presse-étoupe EEx db



APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES



IT - DE



IP66

IK10

CE

EN 60598-1

2014/34/EU



II2GD
Ex db IIB+H2 T6 G
Ex tb IIIC T85°C Db




TUBO FLUORESCENTE / LAMP / LAMP


G13/T8

Ref.	Potencia Watts Puissance	Equipo Equipment Ballast	L	D	D + brida D + clamp D + fixation	Embalaje Packaging Emballage
	(W)		(mm)	(mm)	(mm)	
EX005	1 x 18	■	748	190	208	1
EX001	1 x 36	■	1.357	190	208	1
EX009	1 x 58	■	1.659	190	208	1
EX006	2 x 18	■	748	190	208	1
EX002	2 x 36	■	1.357	190	208	1
EX010	2 x 58	■	1.659	190	208	1

■ Electrónica / Electronic / Électronique



1x



2x

2.3

PYROS

TUBO LED / LED TUBE / TUBE LED

G13/T8


Ref.	Longitud tubo Tube lenght Longueur tube	L	D	D + brida D + clamp D + fixation	Embalaje Packaging Emballage	Peso Weight Poids
	(mm)	(mm)	(mm)	(mm)		(Kg)
EX005L	1 x 600	748	190	208	1	9,7
EX001L	1 x 1.200	1.357	190	208	1	11,5
EX009L	1 x 1.500	1.659	190	208	1	12,3
EX006L	2 x 600	748	190	208	1	9,7
EX002L	2 x 1.200	1.357	190	208	1	11,5
EX010L	2 x 1.500	1.659	190	208	1	12,3

ACCESORIOS PYROS / PYROS ACCESORIES / ACCESSOIRES PYROS



PRENSAESTOPA CABLE ARMADO / ARMED CABLEGLAND EEX / PRESSE-ÉTOUPE ARMÉ EEX

Ref.	Tamaño de rosca (R) Thread size Taille du filet (R)				Dimensiones Dimensions Dimensions				Ø Exterior Ø Overall Ø Extérieur		
	Métrica Metrics Métrique	PG.	NPT	Gas cónica Gas conic Gaz conique	A	B	C	D	Min.	Max.	Tipo Type Type
EX507	M25x1,5	16 21	3/4" 1"	3/4" 1"	35	39	42	15	12	14	a

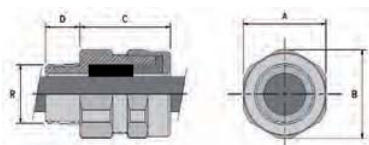

II 2 GD EEx db IIC T6

1-10
DALI

EMERGENCY
1h / 3h