




2.10

WATEX



APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES

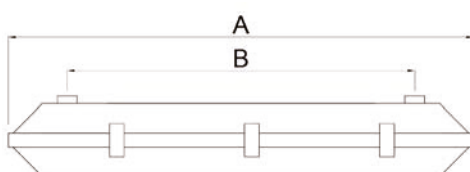

IT - DE



IP66

IK07

CE

EN 60598-1


2014/34/EU



II 3GD
Ex nR IIC T5 Gc
Ex tb IIIC T100°C Dc



1 MODULO LED / 1 LED MODULE / MODULE LED

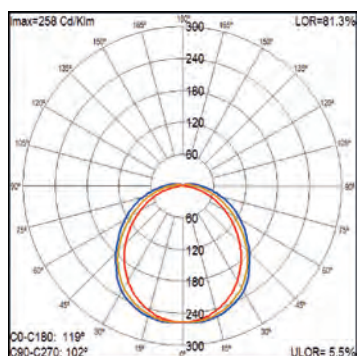

Ref.	Tamaño Size Dimension	Potencia Power Puissance	Emisión bruta Gross output Flux de la source	Emisión neta Net output Flux sortant	Tª color Tª colour Tª couleur	A	B	C	D
		(W)	(Lm)	(Lm)	(°K)	(mm)	(mm)	(mm)	
EW114	600	13	1550	1259	4000	664	260	100	110
EW114U	600	13	1900	1543	4000	664	260	100	110
EW124	600	16	2670	2168	4000	664	260	100	110
EW124U	600	21	3380	2745	4000	664	260	100	110
EW214	1200	24	3200	2598	4000	1274	870	100	110
EW214U	1200	26	3800	3086	4000	1274	870	100	110
EW224	1200	32	5340	4336	4000	1274	870	100	110
EW224U	1200	42	6760	5491	4000	1274	870	100	110
EW314	1500	29	4000	3248	4000	1575	650	100	110
EW314U	1500	32	4750	3858	4000	1575	650	100	110
EW324	1500	40	6700	5440	4000	1575	650	100	110
EW324U	1500	46	7000	5686	4000	1575	650	100	110

REF. + U = TENSIÓN DE ALIMENTACIÓN 110-277V/50-60HZ